

PRODUCT BULLETIN

SQUARE WASHERS Metric

INTRODUCING 28 NEW SIZES Flat Square Washers

ESTIMATED TIME OF ARRIVAL: AVAILABLE NOW!

Plain, Zinc Plated, Hot Dipped Galvanised

Bremick® have expanded the range of carbon steel metric flat square washers that now also includes M36 and Plain/Black.

KEY FEATURES AND BENEFITS

APPLICATION

Bremick® flat square washers can be used in a wide range of applications and are commonly installed to distribute load forces over a larger surface area, particularly on softer materials or slotted holes, helping to prevent surface damage and improve load bearing stability of the joint.

PRODUCT ATTRIBUTES

- Material Class: Carbon Steel
- Standard: Complies to Bremick Specification

COATING / MATERIAL


- Plain/Black/Natural
- Zinc Plated
- Hot Dipped Galvanised

CODE PREFIX: WSQM

PLAIN

**ZINC
YELLOW**

**HOT DIPPED
GALVANISED**

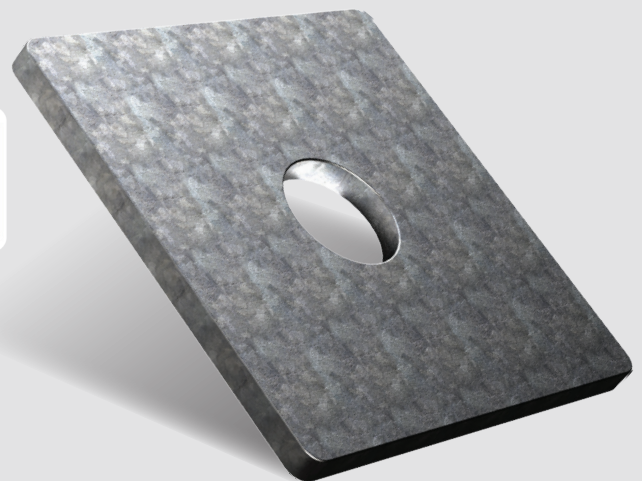

AUSTRALIA

88 Dalmeny Avenue, Rosebery NSW 2018
02 8332 1500




NEW ZEALAND

M20 Business Park, 70A Plunket Avenue, Manukau Auckland
+64 (09) 525 2244

PRODUCT BULLETIN

Square mm	38	40	40	50	50	50	65	65	75	75	75	75	100	100	100	100	FINISH
Thickness mm	3	3	5	3	5	6	5	6	5	6	8	10	6	8	10	12	
8mm	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Plain/Black
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Yellow Zinc
	●	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Galvanised
10mm	-	-	-	●	-	-	-	-	-	-	-	-	-	-	-	-	Plain/Black
	-	●	-	●	-	-	-	-	-	-	-	-	-	-	-	-	Yellow Zinc
	●	●	-	●	●	●	-	-	-	-	-	-	-	-	-	-	Galvanised
12mm	-	-	●	●	-	-	-	-	-	-	-	-	-	-	-	-	Plain/Black
	-	-	-	●	●	-	-	-	-	-	-	-	-	-	-	-	Yellow Zinc
	-	●	-	●	●	●	●	-	●	●	-	-	-	-	-	-	Galvanised
16mm	-	-	-	-	-	-	●	-	●	●	-	-	-	-	-	-	Plain/Black
	-	-	-	●	●	-	●	-	-	-	-	-	-	-	-	-	Yellow Zinc
	-	-	-	●	●	●	●	●	●	●	-	-	-	-	●	-	Galvanised
20mm	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Plain/Black
	-	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-	Yellow Zinc
	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	Galvanised
24mm	-	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-	Plain/Black
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Yellow Zinc
	-	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	Galvanised
30mm	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Plain/Black
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Yellow Zinc
	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	Galvanised
36mm	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Plain/Black
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Yellow Zinc
	-	-	-	-	-	-	-	-	-	-	●	-	-	●	●	●	Galvanised

Product in **GREEN ●** are new lines

COATING/MATERIAL	DESCRIPTION	OVERVIEW	CORROSION RESISTANCE	
Plain/Black/ Natural	Plain, Black & Natural are all terms referring to the fastener not having a coating applied. The product has a light oil added.	Plain or uncoated fasteners offer no corrosion protection they are supplied lightly oiled to inhibit the rust process prior to installation and help during installation.	—	
Zinc Yellow Passivate	Zinc Yellow Passivate is a process of depositing a thin layer of zinc onto the surface of a steel object through electroplating. The steel object is then passivated with a yellow conversion layer.	Bremick® Zinc Yellow Passivate Coating provides a low level of corrosion protection and is recommended for dry internal application. Bremick® Zinc Yellow Passivation complies with AS1789.	Low	
Hot Dipped Galvanised	Hot Dipped Galvanised is a process of dipping a steel object into a molten bath of zinc (455° - 480°C). The molten zinc adheres to the anchor surface covering all the corners and edges.	Bremick® Hot Dipped Galvanised Coating provides a moderate/high level of corrosion protection and is recommended for damp external application. Bremick® Hot Dipped Galvanising complies with AS/NZS 1214.	Moderate/ High	

AUSTRALIA

88 Dalmeny Avenue, Rosebery NSW 2018
02 8332 1500

NEW ZEALAND

M20 Business Park, 70A Plunket Avenue, Manukau Auckland
+64 (09) 525 2244